



Enterprise-level Gateway

Model: LBT-T300

Version: EAC1000

Product Introduction:

EAC1000 is a mid-to-large enterprise-level gateway based on the CAPWAP protocol.

The product is equipped with 6 2.5Gbps network ports, allowing for WAN/LAN interchange. It can be configured with multiple WANs and features WAN load balancing, multi-operator access, line backup, network stacking, and policy routing. It supports intelligent traffic control, internet behavior management, network firewall, VPN settings, remote access control management, and other multi-WAN features. It can accommodate up to 1024 terminal users and provides a high-speed network, effectively preventing network storms and ensuring the normal operation of the network.

It can serve as the main router in the network or a bypass AC. It can manage and configure 512 thin APs. Later, it can also be remotely managed and maintained. Even in different cities and different networks, administrators can monitor, manage, and configure the main page of EAC1000 at any time. The product has the characteristics of high performance, easy installation, and easy maintenance, significantly reducing the labor and material costs in network layout.

EAC1000 can be used as an authentication gateway to connect to the cloud platform, enabling authentication methods such as advertising authentication, user authentication, and SMS authentication.

The product is widely applicable: such as small and medium-sized enterprises, urban villages, hotels, internet cafes, shopping malls, etc.

○ Hardware parameters

Product size	294*430*44.5(L×W×H)
Power supply	65W、AC100V-264V AC voltage input
External interface / Protection level	Reset button: 1 Indicator lights: 4 ATX power switch: 1 2.5GbE RJ45: 6 SFP: 2 Console: 1 USB3.0: 3 Built-in interfaces VAG display interface: 1 USB2.0 PIN connector: 2 RS232 PIN connector: 1
Indicator light	SFP*2、PWR、HDD
Memory	3200MHz DDR4 SO-DIMM Capacity: 8GB
Storage	1 x 6Gb/s SATA connector, CF Type II slot (default 1G SLC CF card), capable of supporting one 2.5-inch hard drive bracket (with shock absorption function), mSATA SSD slot (choose either CF function or SSD slot)
Certification	CE、FCC、CCC
Work environment	Operating temperature: -20 to +55°C Storage temperature: -40 to +75°C Humidity: 5 to 95% (no condensation)


○ Product packaging size/weight

Product weight (kg)	5.5KG
Product dimensions (mm)	294*430*44.5mm
Packaging size (cm)	520x385x150mm
Product packaging weight (kg)	6.5KG
Outer box dimensions (cm)	535x400x175mm
Container weight estimate (kg)	22kg

○ Feature Data

Basic Features	Connection method: Static address, DHCP, PPPoE, bypass mode, static routing function Maximum number of APs managed: 1024 Device functions: Centralized/remote management of AP configuration, one-click intelligent traffic control, multi-line diversion, self-adaptive priority SMS authentication: Local authentication, remote authentication Network protocols: DDNS, VPN management
Behavior management	Comprehensively block P2P software, P2P traffic control and bandwidth allocation, file transfer, URL filtering, and network behavior management.
Broadband control	IP-based broadband control, IP-based session control, bandwidth guarantee/limitation, time-based strategies
Load balancing	Multiple WANs, multiple operator access, intelligent load balancing, line backup, speed overlay, policy routing, protocol binding, online detection
System service	Backup configuration information, restore configuration information, restore factory settings, immediate restart, firmware upgrade, time management including system display time and time synchronization, system logs
Safety Center	IP filtering, MAC filtering, website filtering, URL/keyword filtering, port mapping, DMZ, RCP/UDP/ICMP flood defense, blocking TCP scanning, blocking PING WAN port

○ Product dimensions diagram

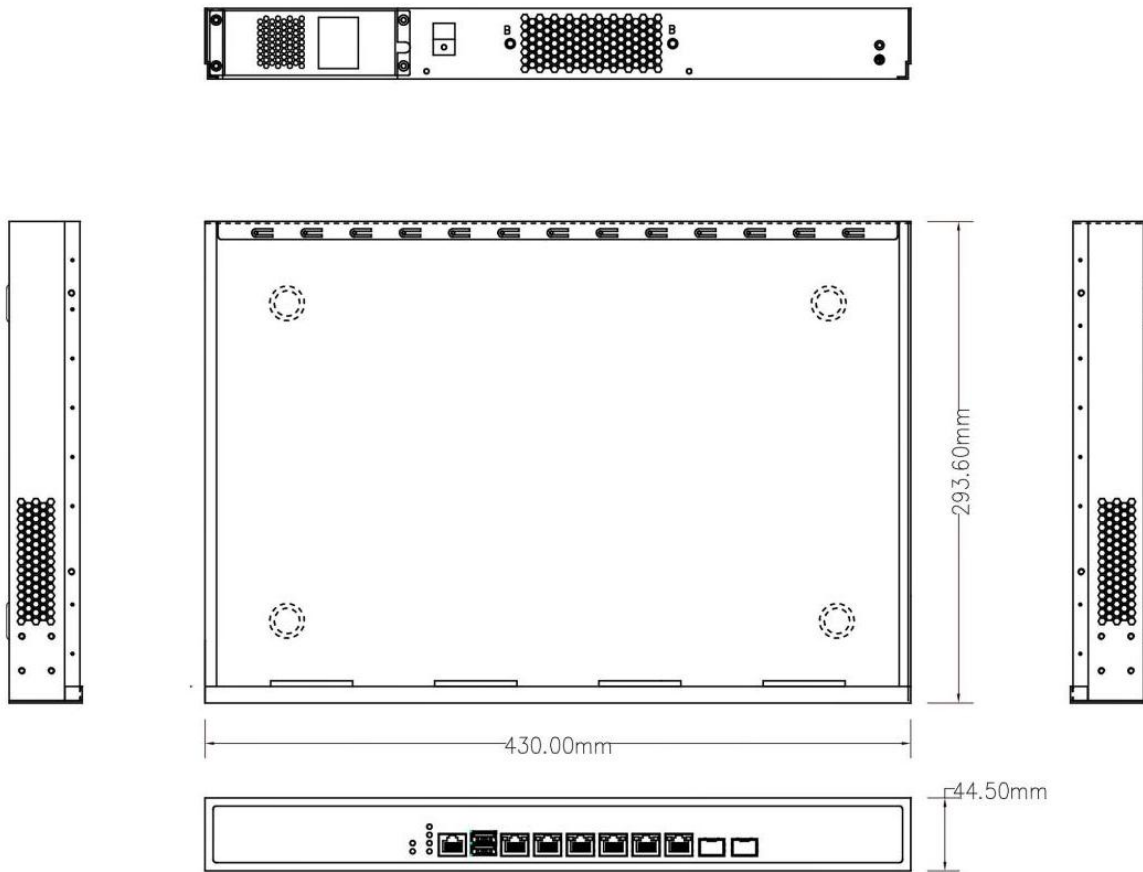

○ Standard accessories

