



4G/5G Industrial Wireless Router

Model: LBT-T300

Version: 390-CN-4GA-W4-S1-RS232

Product Introduction:

The 4G/5G industrial-grade wireless router is a high-performance wireless communication product developed by Shenzhen LINBLE Technology Co., Ltd. based on the requirements of 4G/5G networks. It is mainly used for industrial users' data transmission services, supporting functions such as transparent data transmission, image transmission, device monitoring and wireless routing for Internet access.

4G/5G industrial-grade wireless routers, with embedded high-performance cpus, effortlessly handle advanced applications such as routing and security, and can be paired with multiple 4G/5G industrial communication modules (TDD-LTE/FDD-LTE networks). It provides 10/100M Ethernet ports, WIFI wireless interfaces, and serial ports. Compatible with a variety of terminal devices. Supports WEB configuration for easy and simple management, and supports remote cloud control.

Countries	4G/5G network solutions	Wireless network	Number of slots	Serial port Protocol	Custom content
CN= China Version EU= European version NA= North American version GL= Global Edition SA= South American version JP= Japanese version AU= Australian version	A= Domestic Q= Qualcomm V=4G private network R=Redcap H= hisilicon	W0= No WiFi W4=WiFi4 W5=WiFi5 W6=WiFi6	S1= Single card S2= Dual cards	RS232 RS485 TTL	DO POE GPS ESIM

Example: 390-CN-4GA-W4-S1-RS232; Version 390, China 4G domestic solution, single band WiFi4, single card, protocol RS232, no customization

Note: Some versions do not allow customization of the above content.

○ Hardware parameters

Product size	143*102.7*31mm(L×W×H)(antenna interface excluded)
Power supply	Dc power supply: 7-35V/ 3A
GPS	Customizable GNSS positioning module, supporting RTK technology, and featuring a hybrid engine compatible with multiple satellite systems (GPS, GLONASS, Beidou, WAAS, EGNOS, MSAS, GAGAN).
External interface	Reset key: 1 LED indicators: 8 Antenna interface: 1-7 (customizable) SIM card slots: 1-2 (customizable) DC power input/terminal power supply: 2.1mm round power jack (recommended power >10W), 2-pin female terminal Edg3.5mm
Protection grade	RS232/485 interface: 1 (customizable) (2.0mm 4PIN connector) LAN ports: 5 (WAN/LAN0 switchable) Digital output (DO) ports: 2 (customizable) Protection rating: IP30
Indicator light	LINK 、 SYS 、 WAN/LAN0~LAN4
Antenna	SMA external rotating inner hole
Storage memory	Storage :8MB, memory: 64MB
Power consumption (current)	4G: less than 400 mA 5G: less than 800mA
Authentication	CE, FCC, CCC
Operating temperature Humidity	Operating temperature: -20 to +70 ° C Storage temperature: -40 to +80 ° C Humidity: 5 to 95% (non-condensing)


○ Feature Data

Basic Features	4G Internet Protocol: 4G Dial-up Internet via DHCP/Static IP/PPPoE Supported User Count: Wired: 253, Wireless: 30 VPN Protocols: PPTP Client, L2TP Client (supported only in dedicated network version) Wi-Fi Protocols: IEEE 802.11b/g/n Network Features: NAT, DNAT, DMZ, Port Forwarding
Operating frequency band	2412-2472MHz
WiFi transmission Rate/Data	Transfer rate: 300Mbps(MAX) (theoretical maximum) WiFi data: 802.11n: -66dBm at 300 Mbps HT40MCS7: +14dBm(±2dB) 802.11b: -86dBm at 11Mbps/CCK: +14dBm(±2dB) 802.11g: -73dBm at 54Mbps/OFDM: +14dBm(±2dB)
WLAN Security Consultative	OpenSystem, WPA-PSK, WPA2-PSK, WPAPSK/WPA2 PSK, WPA1 / WPA2
System Services	Virtual servers, port triggers, serial port services, firewalls, MAC filtering, access control, port blocking, regional Settings, factory reset, NTP server Settings, backup system information, software upgrades, remote management
Operating system Browser Requirements	System :Windows XP/VISTA, Linux 2.6, Windows 7 , MAC OS: 1 0.3.7 ; Browser :IE:6.0 Safari:1.2.4 Firefox:2.0.0.8

○ Product packaging size/weight

Product weight (g)	338g
Product dimensions (mm)	143*102.7*31mm
Packaging size (cm)	35*18*7cm
Product packaging weight (kg)	1kg
Outer box dimensions (cm)	71.3*44.3*26.8cm
Container weight estimate (kg)	10kg

Housing positioning holes

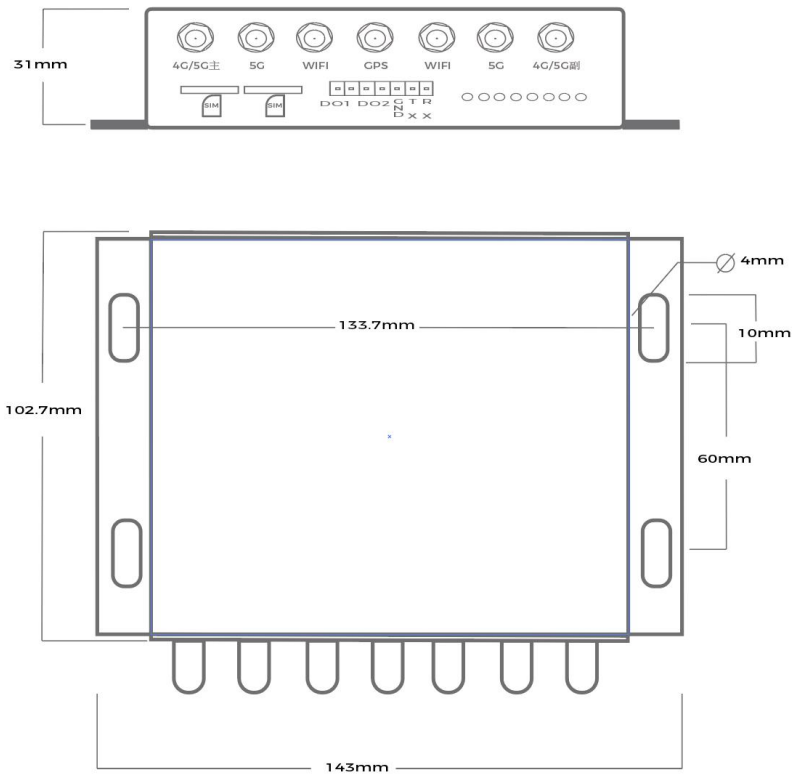

Optional frequency bands

4G band	CN: FDD-LTE B1/3/5/8 TDD-LTE B38/39/40/41 EU: FDD-LTE B1/3/5/7/8/20 TDD-LTE B38/39/40/41 AU:FDD-LTE B1/3/5/7/8/20/28 TDD-LTE B38/40/41 NA: FDD-LTE B2/3/4/5/7/8/12/13/17/25/26/66 TDD-LTE B41 SA: FDD-LTE B2/4/5/7/8/28 TDD-LTE B40 J: FDD-LTE B1/3/8/18/19/26 TDD-LTE 41 GL: FDD-LTE B1/2/3/4/5/7/8/17/20/28 TDD-LTE B38/39/40/41
5G band (Optional)	CN: 5G NR NSA:N41/78/79 5G NR SA:N1/8/28/41/78/79 LTE-FDD B1/3/5/8 LTE-TDD: B34/38/39/40/41 EA: 5GSA&NSA:N1/3/5/7/8/20/28/38/40/41/71/77/78/79 LTE-FDD: B1/3/5/7/8/18/19/20/28/32 LTE-TDD: B34/38/39/40/41/42 GL:5G NR SA: n1/2/3/5/7/8/12/20/25/28/38/40/41/48/66/71/77/78/79 5G NR NSA: n38/41/77/78/79 LTE-FDD: B1/2/3/4/5/7/8/12/13/14/17/18/19/20/25/26/28/29/30/32/66 /71 LTE-TDD: B34/38/39/40/41/42/43/48

Standard accessories



Power adapter *1

Optional: British Standard /
European Standard / American
Standard



2 m suction cup antenna -
WiFi



2 m suction cup antenna -4G
(Optional cabinet antenna, rubber stick
antenna, etc.)



Certificate of conformity *1